



Finish Line™


FIBER GRIP™

Carbon Fiber Assembly Gel

Finish Line's Fiber Grip™ is specially designed to create friction and reduce slippage between clamped carbon fiber surfaces.

Fiber Grip eliminates the need to over tighten clamps to achieve secure connections. Over tightening can cause internal fractures and fatigue of carbon fiber parts. For best results, apply Fiber Grip in a thin film to clamping areas of stems, handlebars, seat posts, and seat tubes. Fiber Grip has been tested and approved by leading carbon fiber component manufacturers.

Available in 6cc Sachets, 50g, 450g, 35lb

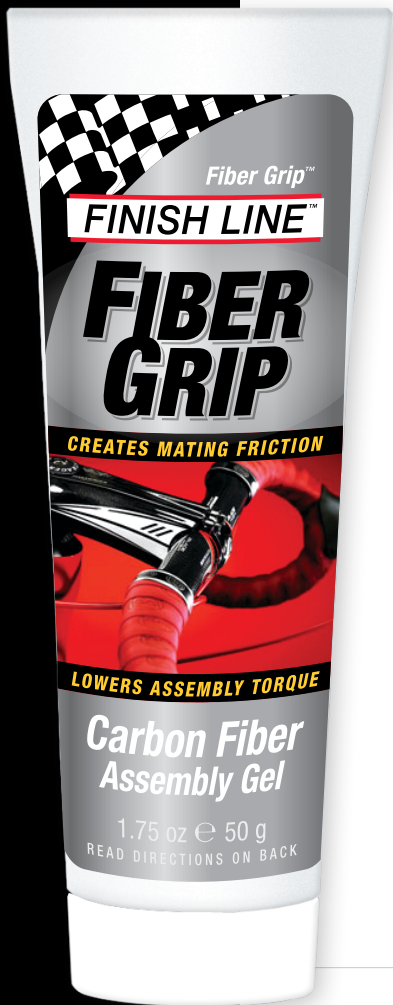

TYPICAL SPECIFICATIONS	
Thickener Type	Fumed Silica
Thickener Compatability	All Grease Types
NLGI Grade	2
Texture	Non-Toxic Thixotropic Abrasive
Color	Translucent Gray
Odor	Odor-Free
Average Particle Size	100-200 Microns
Applied Force to Move Carbon Surfaces	294 lbs
Oil Type	White USP Mineral
Viscosity SUS @ 100°F	350
Functional Solids	Non-Toxic Inert Abrasive
Dropping Point (ASTM D 2265) °F (°C)	No Drop
Oil Separation (ASTM D 1742) - 24 hours @ 25°C (77°F) (%)	0.10
Oxidation Stability	
psi press. drop/100 hours	0
Rust test rating (ASTM D 1743)	Pass
Water washout (ASTM D 1264) @ 79°C (175°F) % loss	1

MANUFACTURED IN USA BY:
 © 2008 Finish Line Technologies • 1545 Fifth Industrial Court • Bay Shore, NY 11706
 Tel: 631-666-7300 • Fax: 631-666-7391 • www.FinishLineUSA.com